



Figure similar

MLFB-Ordering data

6SL3210-5BE32-2UV0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																		
Input <table border="1"> <tr> <td>Number of phases</td> <td>3 AC</td> </tr> <tr> <td>Line voltage</td> <td>380 ... 480 V -15 % +10 %</td> </tr> <tr> <td>Line frequency</td> <td>47 ... 63 Hz</td> </tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V -15 % +10 %	Line frequency	47 ... 63 Hz	<table border="1"> <tr> <td>Power factor λ</td> <td>0.72</td> </tr> <tr> <td>Offset factor $\cos \varphi$</td> <td>0.95</td> </tr> <tr> <td>Efficiency η</td> <td>0.98</td> </tr> <tr> <td>Filter class (integrated)</td> <td>Unfiltered</td> </tr> </table>	Power factor λ	0.72	Offset factor $\cos \varphi$	0.95	Efficiency η	0.98	Filter class (integrated)	Unfiltered																				
Number of phases	3 AC																																		
Line voltage	380 ... 480 V -15 % +10 %																																		
Line frequency	47 ... 63 Hz																																		
Power factor λ	0.72																																		
Offset factor $\cos \varphi$	0.95																																		
Efficiency η	0.98																																		
Filter class (integrated)	Unfiltered																																		
Output <table border="1"> <tr> <td>Number of phases</td> <td>3 AC</td> </tr> <tr> <td>Rated voltage</td> <td>400 V</td> </tr> <tr> <td>Rated power (HO)</td> <td>22.00 kW / 30.00 hp</td> </tr> <tr> <td>Rated power (LO)</td> <td>30.00 kW / 40.00 hp</td> </tr> <tr> <td>Rated current (HO)</td> <td>45.00 A</td> </tr> <tr> <td>Rated current (LO)</td> <td>60.00 A</td> </tr> <tr> <td>Rated current (HO) at 480V</td> <td>40.00 A</td> </tr> <tr> <td>Rated current (LO) at 480V</td> <td>52.00 A</td> </tr> <tr> <td>Pulse frequency</td> <td>4.00 kHz</td> </tr> <tr> <td>Output frequency</td> <td>0 ... 550 Hz</td> </tr> </table>	Number of phases	3 AC	Rated voltage	400 V	Rated power (HO)	22.00 kW / 30.00 hp	Rated power (LO)	30.00 kW / 40.00 hp	Rated current (HO)	45.00 A	Rated current (LO)	60.00 A	Rated current (HO) at 480V	40.00 A	Rated current (LO) at 480V	52.00 A	Pulse frequency	4.00 kHz	Output frequency	0 ... 550 Hz	Ambient conditions <table border="1"> <tr> <td>Cooling</td> <td>External fan</td> </tr> <tr> <td>Installation altitude</td> <td>1000 m (3281 ft)</td> </tr> <tr> <td>Ambient temperature</td> <td></td> </tr> <tr> <td>Operation</td> <td>-10 ... 60 °C (14 ... 140 °F)</td> </tr> <tr> <td>Storage</td> <td>-40 ... 70 °C (-40 ... 158 °F)</td> </tr> <tr> <td>Relative humidity</td> <td></td> </tr> <tr> <td>Max. operation</td> <td>95 %</td> </tr> </table>	Cooling	External fan	Installation altitude	1000 m (3281 ft)	Ambient temperature		Operation	-10 ... 60 °C (14 ... 140 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Relative humidity		Max. operation	95 %
Number of phases	3 AC																																		
Rated voltage	400 V																																		
Rated power (HO)	22.00 kW / 30.00 hp																																		
Rated power (LO)	30.00 kW / 40.00 hp																																		
Rated current (HO)	45.00 A																																		
Rated current (LO)	60.00 A																																		
Rated current (HO) at 480V	40.00 A																																		
Rated current (LO) at 480V	52.00 A																																		
Pulse frequency	4.00 kHz																																		
Output frequency	0 ... 550 Hz																																		
Cooling	External fan																																		
Installation altitude	1000 m (3281 ft)																																		
Ambient temperature																																			
Operation	-10 ... 60 °C (14 ... 140 °F)																																		
Storage	-40 ... 70 °C (-40 ... 158 °F)																																		
Relative humidity																																			
Max. operation	95 %																																		
	Communication <table border="1"> <tr> <td>Communication</td> <td>USS, Modbus RTU</td> </tr> </table>	Communication	USS, Modbus RTU																																
Communication	USS, Modbus RTU																																		
	Standards <table border="1"> <tr> <td>Compliance with standards</td> <td>CE, cULus, C-Tick (RCM), KC</td> </tr> <tr> <td>CE marking</td> <td>EN 61800-5-1 /EN 60204-1 and EN 61800-3</td> </tr> </table>	Compliance with standards	CE, cULus, C-Tick (RCM), KC	CE marking	EN 61800-5-1 /EN 60204-1 and EN 61800-3																														
Compliance with standards	CE, cULus, C-Tick (RCM), KC																																		
CE marking	EN 61800-5-1 /EN 60204-1 and EN 61800-3																																		

Overload capability

Low Overload (LO)

110 % rated output current for 60 s, cycle time 300 s

High Overload (HO)

150 % rated output current for 60 s, cycle time 300 s



Figure similar

Mechanical data

Mounting position	Through-hole mounting / wall mounting / side-by-side mounting
Degree of protection	IP20 / UL open type
Size	FSE
Net weight	6.45 kg (14.22 lb)
Width	245.0 mm (9.65 in)
Height	264.5 mm (10.41 in)
Depth	209.0 mm (8.23 in)

Inputs / outputs

Standard digital inputs

Number	4
--------	---

Digital outputs

Number as relay changeover contact	1
Number as transistor	1

Analog inputs

Number	2 (Can be used as additional digital input)
--------	---

Analog outputs

Number	1
--------	---


Connections

Max. motor cable length

Shielded	50 m (164 ft)
Unshielded	100 m (328 ft)

Converter losses to IEC61800-9-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	38.60 %

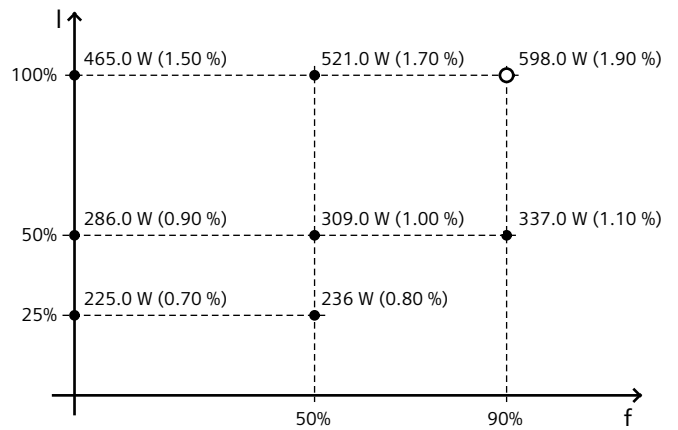

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values